


Installation instruction do88 performance air intake for Volvo S60 / V60 / XC60 / S90 / V90 / XC90 SPA platform

Part number: LF-140

This instruction shows how to replace the OEM air intake with do88 performance air intake.

At this type of installation we always recommend that you have mechanical experience and knowledge about safety during work on vehicles.

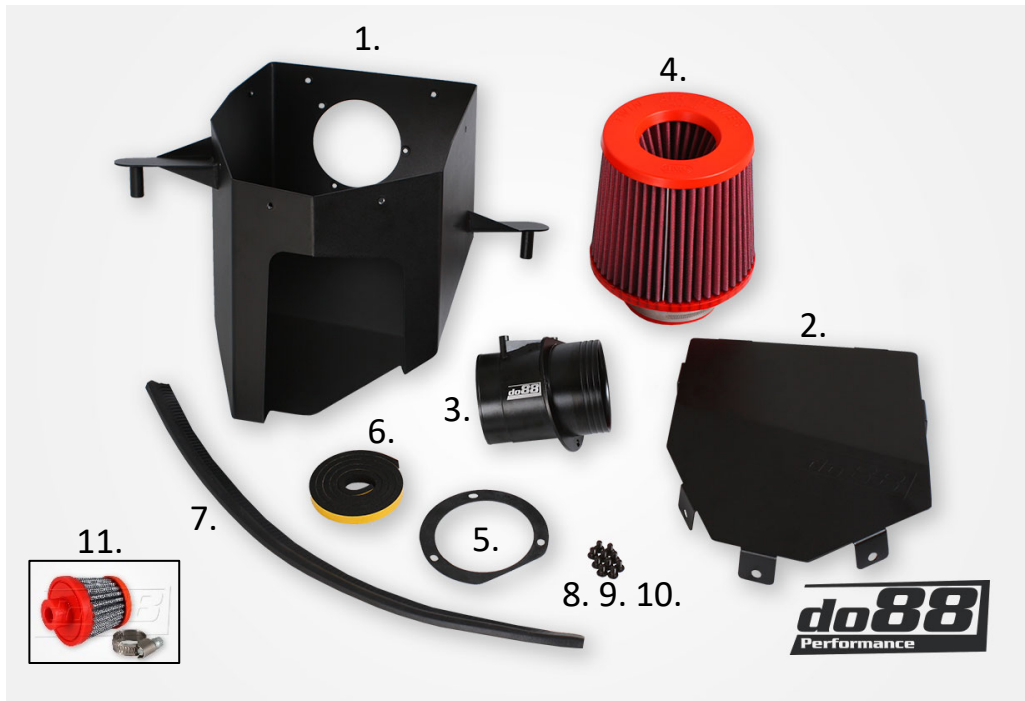


Parts included:

1. 1pc Air filter housing
2. 1pc Air filter housing lid
3. 1pc Air mass meter housing
4. 1pc BMC air filter
5. 1pc Gasket
6. 85cm Adhesive sealing strip
7. 50cm Edge sealing strip
8. 3pcs M5x8mm Black Allen screws
9. 7pcs M5x12mm Black Allen screws
10. 2pcs M4x10mm Black Allen screws
11. 1pc BMC 12mm air filter (Only for cars with D5 diesel engine)
12. 370mm stripe (Only for cars with air suspension) (Not on picture)


This installation instruction are based on our installation performed on a Volvo V60 T6 MY -19. Other vehicles this product fit to might have some differences in the installation procedure.



1. Disconnect cable from AMM sensor (1.) cut stipe that holds cable (2.) loosen the hose clamp (3.)

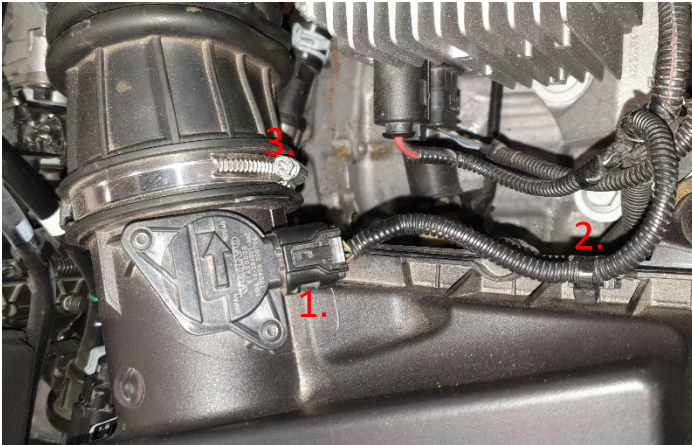

3. Remove the air mass meter sensor from housing by removing 2pcs Torx T20 and lift it up.

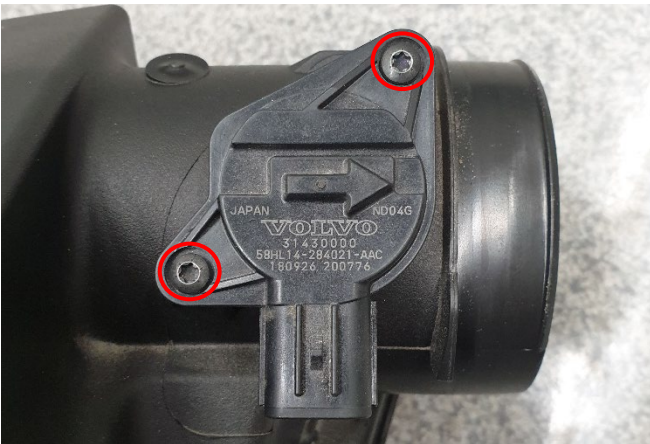

2. Remove air filter housing by pulling it upwards so it separates from its rubber grommets and at the same time slide the hose off from the air mass meter housing.

4. Install air mass meter in housing and secure with 2x included M4x10 Black Allen screws. Mount the air mass meter housing on the air filter housing with the included gasket between them, secure with included 3pcs M5x8 Black Allen screws.



5. Install the included Edge sealing strip on the air filter housing according to picture.



6. Install the included Adhesive sealing strip in the air filter housing lid according to picture.



7. Install air filter to air mass meter housing using the included hose clamp.




8. Optional! If you prefer more intake sound it is possible to use the air filter system without the lid, but this will also increase the intake air temperature a bit. Mount the lid to the air filter housing using the included 7pcs M5x12 Black Allen screws. Just insert the screws without tightening. Then push the lid down towards the air filter housing while tightening the screws.



9. Install the do88 air box in vehicle by lowering it in place in the rubber grommets, mount the hose on the air mass meter housing and tighten its hose clamp. Connect the air mass meter electrical connector.

Finished!

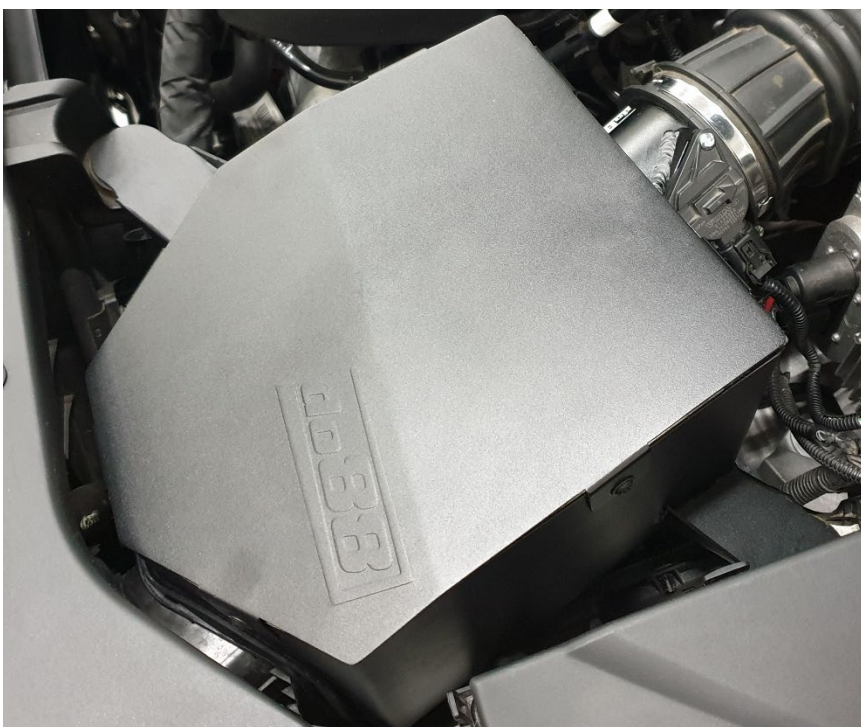

10. **Only for cars with D5 diesel engines.** Install the included 12mm air filter on the small plastic air supply line and secure it with the clamp. Position it according to picture and secure with included stripe.

